SYNCRO

PRODUCT SPECIFICATION

STEFAB INDUSTRIAL LAUNDRY

Front Loading Washing Machines.

Automatic Time, Temperature & Level Control. 30, 60 & 120 kg. Capacity.

'LM' Range

LMS 30 | LME 30 | LMS 60 | LME 60 | LMS 120

Model LMS-Steam Heated • LME-Electric Heated



01 All Stainless Steel.

02 Electrical Control Panel.

03 Motorized Drain Valve.

CAPACITY	MODELS	HEATING	SUPPORT
30, 60 & 120 kg	5	Steam · Electric	24/7
Automatic Time, Temperature & Level Control. 30, 60 & 120 kg.	configurations	options available	service network

KEY FEATURES

Built for performance.

Every detail is engineered for reliability, low running cost and effortless operation.



01 All Stainless Steel.

Front, inner cylinder, loading door, outer drum & chemical dispenser all in S.S. Electrically interlocked door stops the machine when opened. Hot painted structure frame. Front & back service. Requires little space on sides. Long Rust Free Life.



02 Electrical Control Panel.

Mounted on top front. Individual controls for automatic time of wash, rinse & low spin extract. Auto reverse. Automatic digital temperature control. Automatic 3 water level control. Solenoid operated water & steam valves. Simple to operate.



03 Motorized Drain Valve.

TECHNICAL DATA

Specifications.

Model LMS-Steam Heated • LME-Electric Heated

PERFORMANCE

MODEL	dry weight per charge CAPACITY	VOLUME	WASH MOTOR	WASH SPEED	LOADING DOOR OPENING	WATER CONNECTION CONSUMPTION
LMS 30 LME 30	1: 9 = 35kg 1:10 = 30kg	318 Ltrs	0.75 KW	33 RPM	Ø 500	Ø25 (1" BSP) 300 Ltrs / cycle
LMS 60 LME 60	1: 9 = 68kg 1:10 = 60kg	617 Ltrs	2.2 KW	33 RPM	Ø 650	Ø38 (1.5" BSP) 600 Ltrs / cycle
LMS 120	1: 9 = 135kg 1:10 = 120kg	1216 Ltrs	3.75 KW	26 RPM	Ø 800	Ø50 (2" BSP) 1200 Ltrs / cycle

UTILITIES & DIMENSIONS

MODEL	DRAIN	HEATING STEAM CONN. STEAM CONSUMP. LOAD ELECTRIC		DIMENSIONS W x D x H	NET WT / CRATED WT CRATED SIZE: WxDxH CRATED VOLUME
LMS 30 LME 30	Ø 65	LMS 30 Ø15 (0.5" BSP) 30 Kg / cycle	LME30 12-18 KW	1050 × 1200 x 1600	750 Kg / 870 Kg 1350 × 1500 × 1900 3.84 M³
LMS 60 LME 60	Ø 65	LMS 60 Ø15 (0.5" BSP) 60 Kg / cycle	LME 60 18-24 KW	1300 × 1450 x 1800	910 Kg / 1060 Kg 1600 × 1750 × 2100 5.88 M³
LMS 120	Ø 65	LMS 120 Ø25 (1" BSP) 120 Kg / cycle	-	1550 × 1900 x 2000	1460 Kg / 1710 Kg 1850 × 2200 × 2300 9.36 M³


CONSUMPTION & ELECTRIC LOAD ARE PRIMARILY FOR THE PURPOSE OF DESIGNING UTILITIES. IMAGES DO NOT ALWAYS SHOW THE OFFERED MACHINE. ALL DIMENSIONS ARE IN MM. STANDARD MACHINES OPERATE ON 415V ±5%, 3 PHASE, 50Hz, AC ELECTRIC SUPPLY. SPECIFICATIONS MENTIONED ABOVE ARE SUBJECT TO CHANGE WITHOUT NOTICE.


DIMENSIONAL DRAWING






"Non Clog Full Clear Port" motorized drain valve flushes all the lint during drain. Easily accessible electric motor is splash proof. Manual lever to activate drain in case of motor failure. **Fail safe, rust free operation through out Its life.**



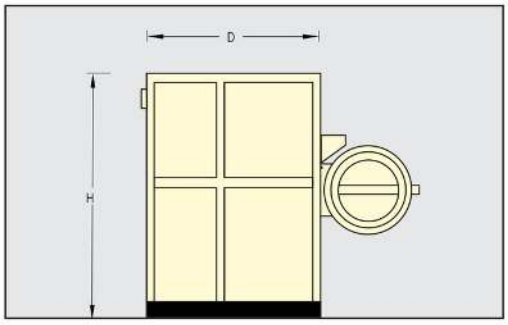

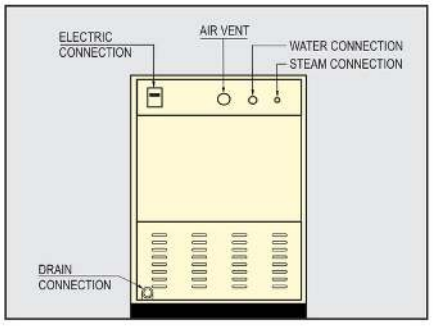

Dimensions in millimetres. Drawings are indicative; please refer to the installation drawing supplied with the machine.