STEFAB INDUSTRIAL LAUNDRY

Front Loading Washing Machines.

Automatic Time, Temperature & Level Control. 30, 60 & 120 kg. Capacity.

'LX' Range

LXS 30 | LXE 30 | LXS 60 | LXE 60 | LXS 120

Model LXS-Steam Heated • LXE-Electric Heated



01 **Extract**

02 **All Stainless Steel.**

03 **Electrical Control Panel.**

CAPACITY	MODELS	HEATING	SUPPORT
30, 60 & 120 kg	5	Steam · Electric	24/7
Automatic Time, Temperature & Level Control. 30, 60 & 120 kg.	configurations	options available	service network


KEY FEATURES

Built for performance.

Every detail is engineered for reliability, low running cost and effortless operation.

01 Extract

Front, inner cylinder, loading door, outer drum & chemical dispenser all in S.S. Electrically interlocked door stops the machine when opened. Hot painted structure frame. Front & back service. Requires little space on sides. Long Rust Free Life.

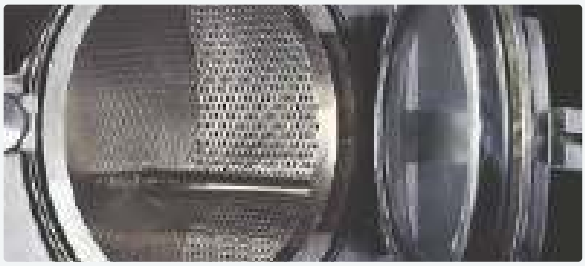


02 All Stainless Steel.



03 Electrical Control Panel.

Mounted on top front. Individual controls for automatic time of wash, rinse & low spin extract. Auto reverse. Automatic digital temperature control. Automatic 3 water level control. Solenoid operated water & steam valves. Simple to operate.

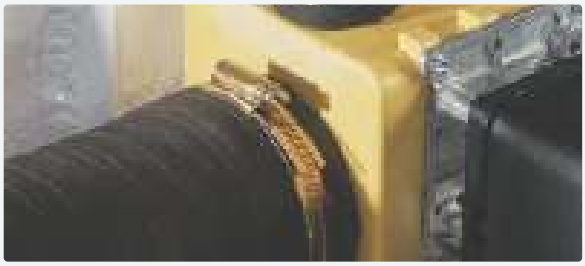

04 Motorized Drain Valve.

TECHNICAL DATA

Specifications.

Model LXS-Steam Heated • LXE-Electric Heated

PERFORMANCE

MODEL	dry weight per charge CAPACITY	VOLUME	WASH MOTOR EXTRACT MOTOR	CYLINDER SPEEDS WASH EXTRACT		LOADING DOOR OPENING	WATER CONNECTION CONSUMPTION
LXS 30 LXE 30	1: 9 = 35kg 1:10 = 30kg	318 Ltrs	2.2 KW 0.75 KW	33 RPM	200 RPM	Ø 500	Ø25 (1" BSP) 400 Ltrs / cycle
LXS 60 LXE 60	1: 9 = 68kg 1:10 = 60kg	617 Ltrs	3.75 KW 2.2 KW	33 RPM	200 RPM	Ø 650	Ø38 (1.5" BSP) 800 Ltrs / cycle
LXS 120	1: 9 = 135kg 1:10 = 120kg	1216 Ltrs	7.5 KW 3.75 KW	26 RPM	160 RPM	Ø 800	Ø50 (2" BSP) 1600 Ltrs / cycle


UTILITIES & DIMENSIONS

MODEL	DRAIN	HEATING STEAM CONN. STEAM CONSUMP. LOAD D ELECTRIC		DIMENSIONS W x D x H	NET WT / CRATED WT CRATED SIZE: WxDxH CRATED VOLUME
LXS 30 LXE 30	Ø 65	LXS 30 Ø15 (0.5" BSP) 30 Kg / cycle	LXE30 12-18 KW	1050 × 1200 x 1600	750 Kg / 870 Kg 1350 × 1500 × 1900 3.84 M³
LXS 60 LXE 60	Ø 65	LXS 60 Ø15 (0.5" BSP) 60 Kg / cycle	LXE 60 18-24 KW	1300 × 1450 x 1800	910 Kg / 1060 Kg 1600 × 1750 × 2100 5.88 M³
LXS 120	Ø 65 2 Nos.	LXS 120 Ø25 (1" BSP) 120 Kg / cycle	-	1550 × 1900 x 2000	1460 Kg / 1710 Kg 1850 × 2200 × 2300 9.36 M³


CONSUMPTION & ELECTRIC LOAD ARE PRIMARILY FOR THE PURPOSE OF DESIGNING UTILITIES. IMAGES DO NOT ALWAYS SHOW THE OFFERED MACHINE. ALL DIMENSIONS ARE IN MM. STANDARD MACHINES OPERATE ON 415V ±5%, 3 PHASE, 50Hz, AC ELECTRIC SUPPLY. SPECIFICATIONS MENTIONED ABOVE ARE SUBJECT TO CHANGE WITHOUT NOTICE.


DIMENSIONAL DRAWING






"Non Clog Full Clear Port" motorized drain valve flushes all the lint during drain. Easily accessible electric motor is splash proof. Manual lever to activate drain in case of motor failure. **Fail safe, rust free operation through out Its life.**



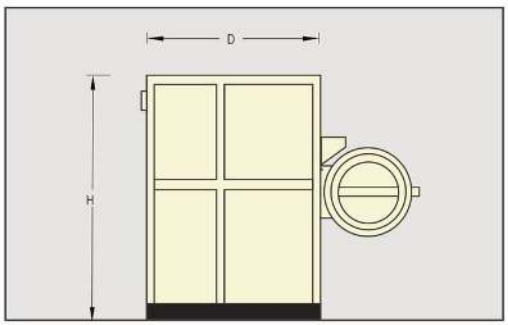

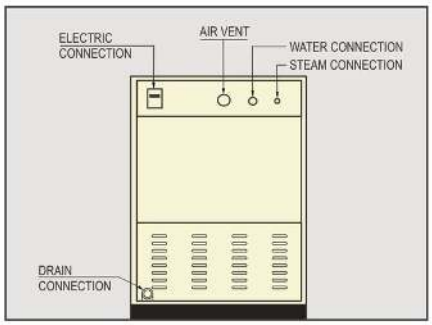

Dimensions in millimetres. Drawings are indicative; please refer to the installation drawing supplied with the machine.